

# Installation Guide for SUNDIALS v2.6.0

Eddy Banks, Aaron M. Collier, Alan C. Hindmarsh, Radu Serban, and Carol S. Woodward  
*Center for Applied Scientific Computing*  
*Lawrence Livermore National Laboratory*

March 9, 2015



UCRL-SM-208116

## **DISCLAIMER**

This document was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor Lawrence Livermore National Security, LLC, nor any of their employees makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or Lawrence Livermore National Security, LLC. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or Lawrence Livermore National Security, LLC, and shall not be used for advertising or product endorsement purposes.

This work was performed under the auspices of the U.S. Department of Energy by Lawrence Livermore National Laboratory under Contract DE-AC52-07NA27344.

# Contents

<b>1</b>	<b>SUNDIALS Package Installation Procedure</b>	<b>1</b>
1.1	CMake-based installation . . . . .	2
1.1.1	Configuring, building, and installing on Unix-like systems . . . . .	2
1.1.2	Configuration options (Unix/Linux) . . . . .	4
1.1.3	Configuration examples . . . . .	7
1.1.4	Working with external Libraries . . . . .	7
1.2	Building and Running Examples . . . . .	8
1.3	Configuring, building, and installing on Windows . . . . .	8
1.4	Installed libraries and exported header files . . . . .	9



# Chapter 1

## SUNDIALS Package Installation Procedure

The installation of any SUNDIALS package is accomplished by installing the SUNDIALS suite as a whole, according to the instructions that follow. The same procedure applies whether or not the downloaded file contains one or all solvers in SUNDIALS.

The SUNDIALS suite (or individual solvers) are distributed as compressed archives (`.tar.gz`). The name of the distribution archive is of the form `solver-x.y.z.tar.gz`, where *solver* is one of: `sundials`, `cvode`, `cvodes`, `ida`, `idas`, or `kinsol`, and `x.y.z` represents the version number (of the SUNDIALS suite or of the individual solver). To begin the installation, first uncompress and expand the sources, by issuing

```
% tar xzf solver-x.y.z.tar.gz
```

This will extract source files under a directory `solver-x.y.z`.

Starting with version 2.6.0 of SUNDIALS, CMake is the only supported method of installation. The explanations on the installation procedure begins with a few common observations:

- The remainder of this chapter will follow these conventions:

***srcdir*** is the directory `solver-x.y.z` created above; i.e., the directory containing the SUNDIALS sources.

***builddir*** is the (temporary) directory under which SUNDIALS is built.

***installdir*** is the directory under which the SUNDIALS exported header files and libraries will be installed. Typically, header files are exported under a directory `installdir/include` while libraries are installed under `installdir/lib`, with *installdir* specified at configuration time.

- For SUNDIALS CMake-based installation, in-source builds are prohibited; in other words, the build directory *builddir* can **not** be the same as *srcdir* and such an attempt will lead to an error. This prevents “polluting” the source tree and allows efficient builds for different configurations and/or options.
- The installation directory *installdir* can **not** be the same as the source directory *srcdir*.
- By default, only the libraries and header files are exported to the installation directory *installdir*. If enabled by the user (with the appropriate toggle for CMake), the examples distributed with SUNDIALS will be built together with the solver libraries but the installation step will result in exporting (by default in a subdirectory of the installation directory) the example sources and sample outputs together with automatically generated configuration files that reference the *installed* SUNDIALS headers and libraries. As such, these configuration files for the SUNDIALS examples can be used as “templates” for your own problems. CMake installs `CMakeLists.txt` files and also (as an option available only under Unix/Linux) makefiles. Note this installation



approach also allows the option of building the SUNDIALS examples without having to install them. (This can be used as a sanity check for the freshly built libraries.)

- Even if generation of shared libraries is enabled, only static libraries are created for the FCMIX modules. (Because of the use of fixed names for the Fortran user-provided subroutines, FCMIX shared libraries would result in "undefined symbol" errors at link time.)

## 1.1 CMake-based installation

CMake-based installation provides a platform-independent build system. CMake can generate Unix and Linux Makefiles, as well as KDevelop, Visual Studio, and (Apple) XCode project files from the same configuration file. In addition, CMake also provides a GUI front end and which allows an interactive build and installation process.

The SUNDIALS build process requires CMake version 2.8.1 or higher and a working compiler. On Unix-like operating systems, it also requires Make (and **curses**, including its development libraries, for the GUI front end to CMake, **ccmake**), while on Windows it requires Visual Studio. While many Linux distributions offer CMake, the version included is probably out of date. Many new CMake features have been added recently, and you should download the latest version from <http://www.cmake.org>. Build instructions for CMake (only necessary for Unix-like systems) can be found on the CMake website. Once CMake is installed, Linux/Unix users will be able to use **ccmake**, while Windows users will be able to use **CMakeSetup**.

As previously noted, when using CMake to configure, build and install SUNDIALS, it is always required to use a separate build directory. While in-source builds are possible, they are explicitly prohibited by the SUNDIALS CMake scripts (one of the reasons being that, unlike autotools, CMake does not provide a **make distclean** procedure and it is therefore difficult to clean-up the source tree after an in-source build). By ensuring a separate build directory, it is an easy task for the user to clean-up all traces of the build by simply removing the build directory. CMake does generate a **make clean** which will remove files generated by the compiler and linker.

### 1.1.1 Configuring, building, and installing on Unix-like systems

The default CMake configuration will build all included solvers and associated examples and will build static and shared libraries. The *installdir* defaults to /usr/local and can be changed by setting the **CMAKE\_INSTALL\_PREFIX** variable. Support for FORTRAN and all other options are disabled.

CMake can be used from the command line with the **cmake** command, or from a **curses**-based GUI by using the **ccmake** command. Examples for using both methods will be presented. For the examples shown it is assumed that there is a top level SUNDIALS directory with appropriate source, build and install directories:

```
% mkdir (...)sundials/installdir
% mkdir (...)sundials/builddir
% cd (...)sundials/builddir
```

#### Building with the GUI

Using CMake with the GUI follows this general process:

- Select and modify values, run configure (c key)
- New values are denoted with an asterisk
- To set a variable, move the cursor to the variable and press enter
  - If it is a boolean (ON/OFF) it will toggle the value
  - If it is string or file, it will allow editing of the string

- For file and directories, the <tab> key can be used to complete
- Repeat until all values are set as desired and the generate option is available (g key)
- Some variables (advanced variables) are not visible right away
- To see advanced variables, toggle to advanced mode (t key)
- To search for a variable press / key, and to repeat the search, press the n key

To build the default configuration using the GUI, from the *builddir* enter the `ccmake` command and point to the *sourcedir*:

```
% ccmake ../sourcedir
```

The default configuration screen is shown in Figure 1.1.

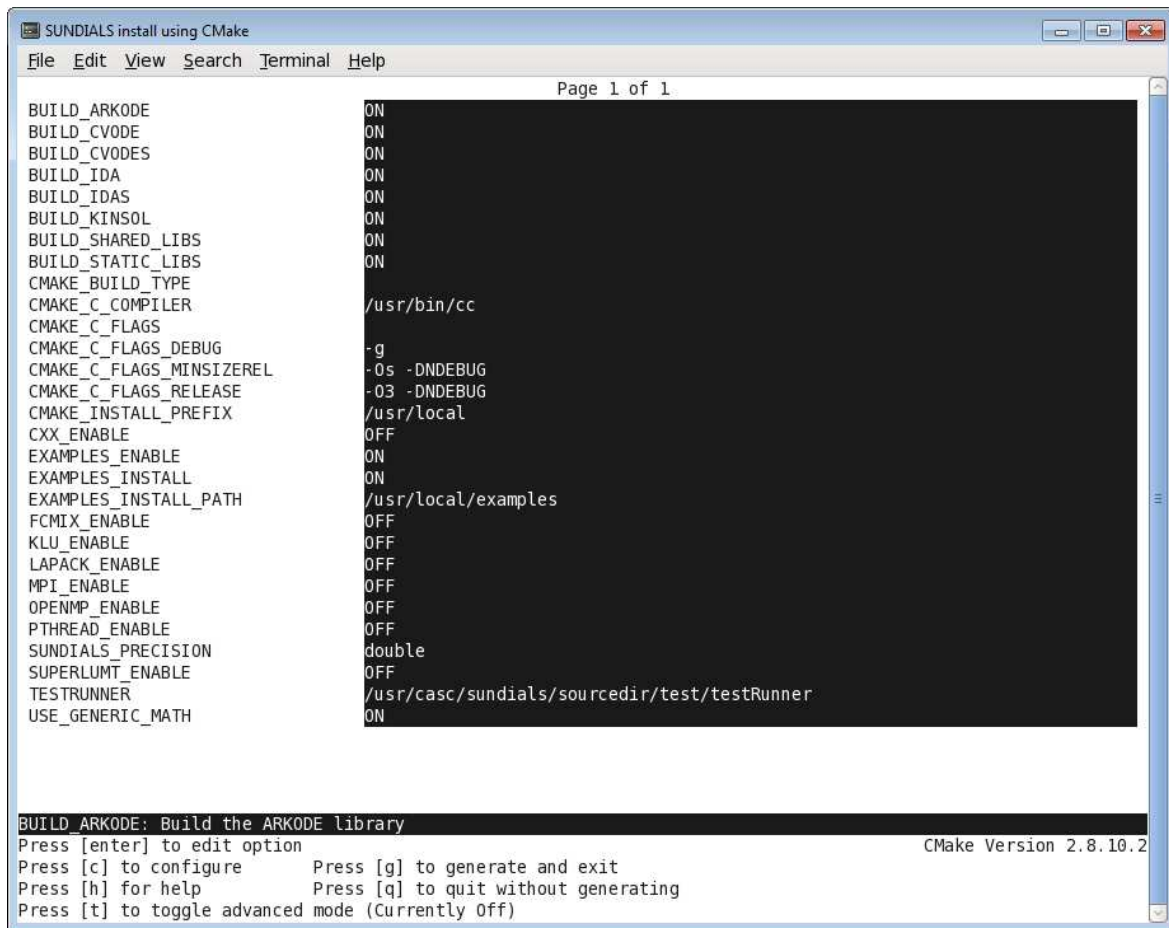


Figure 1.1: Default configuration screen. Note: Initial screen is empty. To get this default configuration, press 'c' repeatedly (accepting default values denoted with asterisk) until the 'g' option is available.

The default *installdir* for both SUNDIALS and corresponding examples can be changed by setting the `CMAKE_INSTALL_PREFIX` and the `EXAMPLES_INSTALL_PATH` as shown in figure 1.2.

Pressing the (g key) will generate makefiles including all dependencies and all rules to build SUNDIALS on this system. Back at the command prompt, you can now run:

```
% make
```

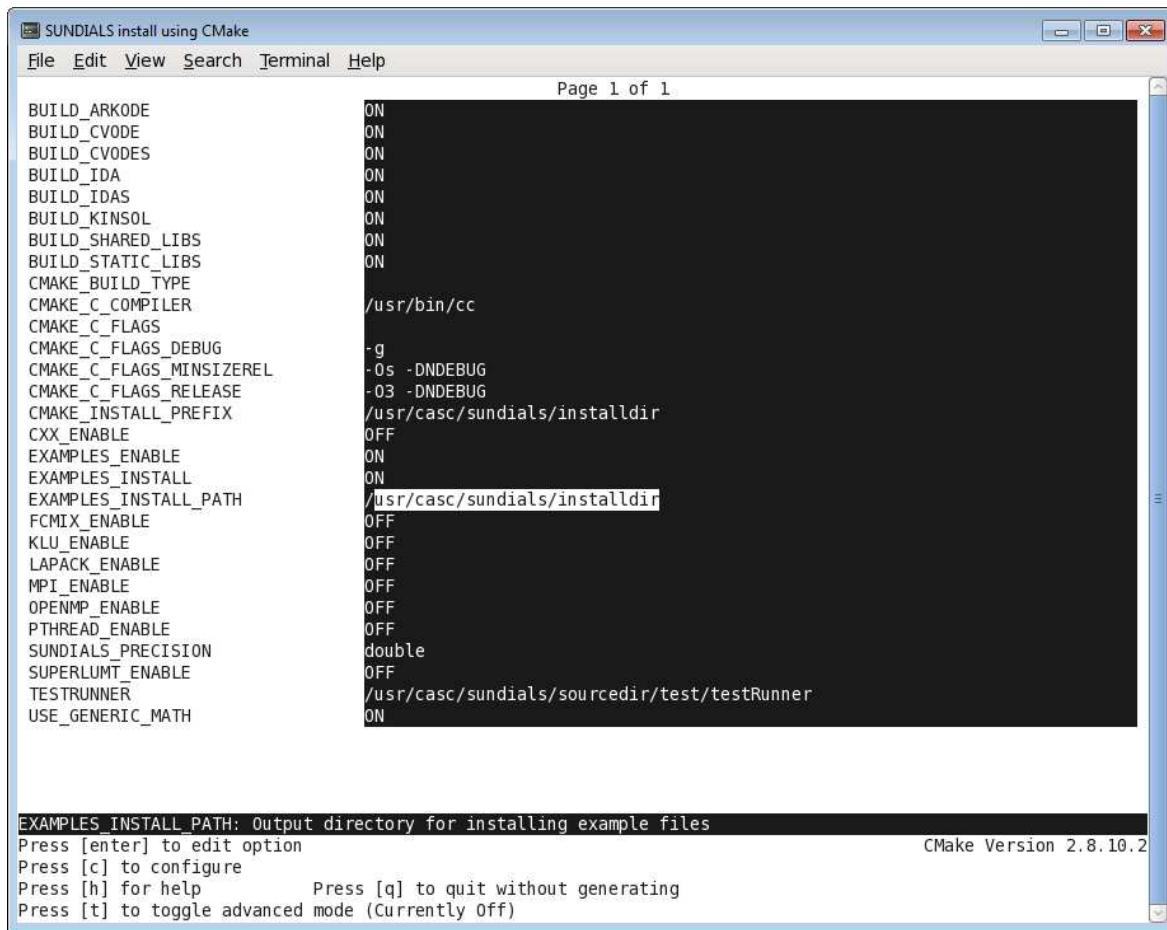


Figure 1.2: Changing the *installdir* for SUNDIALS and corresponding examples

To install SUNDIALS in the installation directory specified in the configuration, simply run:

```
% make install
```

## Building from the command line

Using CMake from the command line is simply a matter of specifying CMake variable settings with the `cmake` command. The following will build the default configuration:

```
% cmake -DCMAKE_INSTALL_PREFIX=/home/myname/sundials/installdir \
> -DEXAMPLES_INSTALL_PATH=/home/myname/sundials/installdir/examples \
> ../sourcedir
% make
% make test
```

### 1.1.2 Configuration options (Unix/Linux)

A complete list of all available options for a CMake-based SUNDIALS configuration is provided below. Note that the default values shown are for a typical configuration on a Linux system and are provided as illustration only.

**BUILD\_ARKODE** - Build the ARKODE library  
Default: ON



BUILD\_CVODE - Build the CVODE library  
Default: ON

BUILD\_CVODES - Build the CVODES library  
Default: ON

BUILD\_IDA - Build the IDA library  
Default: ON

BUILD\_IDAS - Build the IDAS library  
Default: ON

BUILD\_KINSOL - Build the KINSOL library  
Default: ON

BUILD\_SHARED\_LIBS - Build shared libraries  
Default: OFF

BUILD\_STATIC\_LIBS - Build static libraries  
Default: ON

CMAKE\_BUILD\_TYPE - Choose the type of build, options are: None (CMAKE\_C\_FLAGS used) Debug  
Release RelWithDebInfo MinSizeRel  
Default:

CMAKE\_C\_COMPILER - C compiler  
Default: /usr/bin/cc

CMAKE\_C\_FLAGS - Flags for C compiler  
Default:

CMAKE\_C\_FLAGS\_DEBUG - Flags used by the compiler during debug builds  
Default: -g

CMAKE\_C\_FLAGS\_MINSIZEREL - Flags used by the compiler during release minsize builds  
Default: -Os -DNDEBUG

CMAKE\_C\_FLAGS\_RELEASE - Flags used by the compiler during release builds  
Default: -O3 -DNDEBUG

CMAKE\_Fortran\_COMPILER - Fortran compiler  
Default: /usr/bin/gfortran  
Note: Fortran support (and all related options) are triggered only if either Fortran-C support is enabled (FCMIX\_ENABLE is ON) or Blas/Lapack support is enabled (LAPACK\_ENABLE is ON).

CMAKE\_Fortran\_FLAGS - Flags for Fortran compiler  
Default:

CMAKE\_Fortran\_FLAGS\_DEBUG - Flags used by the compiler during debug builds  
Default:

CMAKE\_Fortran\_FLAGS\_MINSIZEREL - Flags used by the compiler during release minsize builds  
Default:

CMAKE\_Fortran\_FLAGS\_RELEASE - Flags used by the compiler during release builds  
Default:

CMAKE\_INSTALL\_PREFIX - Install path prefix, prepended onto install directories  
Default: /usr/local  
Note: The user must have write access to the location specified through this option. Exported SUNDIALS header files and libraries will be installed under subdirectories `include` and `lib` of CMAKE\_INSTALL\_PREFIX, respectively.

**EXAMPLES\_ENABLE** - Build the SUNDIALS examples

Default: ON

**EXAMPLES\_INSTALL** - Install example files

Default: ON

Note: This option is triggered only if building example programs is enabled (**EXAMPLES\_ENABLE** ON). If the user requires installation of example programs then the sources and sample output files for all SUNDIALS modules that are currently enabled will be exported to the directory specified by **EXAMPLES\_INSTALL\_PATH**. A CMake configuration script will also be automatically generated and exported to the same directory. Additionally, if the configuration is done under a Unix-like system, makefiles for the compilation of the example programs (using the installed SUNDIALS libraries) will be automatically generated and exported to the directory specified by **EXAMPLES\_INSTALL\_PATH**.

**EXAMPLES\_INSTALL\_PATH** - Output directory for installing example files

Default: /usr/local/examples

Note: The actual default value for this option will have an **examples** subdirectory created under **CMAKE\_INSTALL\_PREFIX**.

**FCMIX\_ENABLE** - Enable Fortran-C support

Default: OFF

**KLU\_ENABLE** - Enable KLU support

Default: OFF

**LAPACK\_ENABLE** - Enable Lapack support

Default: OFF

Note: Setting this option to ON will trigger the two additional options see below.

**LAPACK\_LIBRARIES** - Lapack (and Blas) libraries

Default: /usr/lib/liblapack.so;/usr/lib/libblas.so

Note: CMake will search for these libraries in your **LD\_LIBRARY\_PATH** prior to searching default system paths.

**MPI\_ENABLE** - Enable MPI support

Default: OFF

Note: Setting this option to ON will trigger several additional options related to MPI.

**MPI\_MPICC** - mpicc program

Default:

**MPI\_RUN\_COMMAND** - Specify run command for MPI

Default: mpirun

Note: This can either be set to **mpirun** for OpenMPI or **srun** if jobs are managed by SLURM - Simple Linux Utility for Resource Management as exists on LLNL's high performance computing clusters.

**MPI\_MPIF77** - mpif77 program

Default:

Note: This option is triggered only if using MPI compiler scripts (**MPI\_USE\_MPISCRIPITS** is ON) and Fortran-C support is enabled (**FCMIX\_ENABLE** is ON).

**OPENMP\_ENABLE** - Enable OpenMP support

Default: OFF

Turn on support for the OpenMP based nvector.

PTHREAD\_ENABLE - Enable Pthreads support

Default: OFF

Turn on support for the Pthreads based nvector.

SUNDIALS\_PRECISION - Precision used in SUNDIALS, options are: double, single or extended

Default: double

SUPERLUMT\_ENABLE - Enable SUPERLU\_MT support

Default: OFF

TESTRUNNER - Location of testRunner script

Default: sourcedir/testRunner

USE\_GENERIC\_MATH - Use generic (stdc) math libraries

Default: ON

### 1.1.3 Configuration examples

The following examples will help demonstrate usage of the CMake configure options.

To configure SUNDIALS using the default C and Fortran compilers, and default mpicc and mpif77 parallel compilers, enable compilation of examples, and install libraries, headers, and example sources under subdirectories of /home/myname/sundials/, use:

```
% cmake \  
> -DCMAKE_INSTALL_PREFIX=/home/myname/sundials/installdir \  
> -DEXAMPLES_INSTALL_PATH=/home/myname/sundials/installdir/examples \  
> -DMPI_ENABLE=ON \  
> -DFCMIX_ENABLE=ON \  
> /home/myname/sundials/sourcedir  
%  
% make install  
%
```

To disable installation of the examples, use:

```
% cmake \  
> -DCMAKE_INSTALL_PREFIX=/home/myname/sundials/installdir \  
> -DEXAMPLES_INSTALL_PATH=/home/myname/sundials/installdir/examples \  
> -DMPI_ENABLE=ON \  
> -DFCMIX_ENABLE=ON \  
> -DEXAMPLES_INSTALL=OFF \  
> /home/myname/sundials/sourcedir  
%  
% make install  
%
```

### 1.1.4 Working with external Libraries

The SUNDIALS Suite contains many options to enable implementation flexibility when developing solutions. The following are some notes addressing specific configurations when using the supported third party libraries.

#### Building with LAPACK and BLAS

To enable LAPACK and BLAS libraries, set the LAPACK\_ENABLE option to ON. If the directory containing the LAPACK and BLAS libraries is in the LD\_LIBRARY\_PATH environment variable, CMake will set the LAPACK\_LIBRARIES variable accordingly, otherwise CMake will attempt to find the LAPACK

and BLAS libraries in standard system locations. To explicitly tell CMake what libraries to use, the `LAPACK_LIBRARIES` variable can be set to the desired libraries. Example:

```
% cmake \  
> -DCMAKE_INSTALL_PREFIX=/home/myname/sundials/installdir \  
> -DEXAMPLES_INSTALL_PATH=/home/myname/sundials/installdir/examples \  
> -DLAPACK_LIBRARIES=/mypath/lib/liblapack.so;/mypath/lib/libblas.so \  
> /home/myname/sundials/sourcedir  
%  
% make install  
%
```

## Building with KLU

The KLU libraries are part of SuiteSparse, a suite of sparse matrix software, available from the Texas A&M University website: <http://faculty.cse.tamu.edu/davis/suitesparse.html>. SUNDIALS has been tested with SuiteSparse version 4.2.1. To enable KLU, set `KLU_ENABLE` to `ON`, set `KLU_INCLUDE_DIR` to the `include` path of the KLU installation and set `KLU_LIBRARY_DIR` to the `lib` path of the KLU installation. The CMake configure will result in populating the variables: `AMD_LIBRARY`, `AMD_LIBRARY_DIR`, `BTF_LIBRARY`, `BTF_LIBRARY_DIR`, `COLAMD_LIBRARY`, `COLAMD_LIBRARY_DIR`, and `KLU_LIBRARY`.

## Building with SuperLU\_MT

The SuperLU\_MT libraries are available for download from the Lawrence Berkeley National Laboratory website: [http://crd-legacy.lbl.gov/~xiaoye/SuperLU/#superlu\\_mt](http://crd-legacy.lbl.gov/~xiaoye/SuperLU/#superlu_mt). SUNDIALS has been tested with SuperLU\_MT version 2.4. To enable SuperLU\_MT, set `SUPERLUMT_ENABLE` to `ON`, set `SUPERLUMT_INCLUDE_DIR` to the `SRC` path of the SuperLU\_MT installation and set `SUPERLUMT_LIBRARY_DIR` to the `lib` path of the SuperLU\_MT installation. Also, the `SUPERLUMT_THREAD_TYPE` must be set to either `Pthread` or `OpenMP`.

Do not mix thread types when building SUNDIALS solvers. If threading is enabled for SUNDIALS by having either `OPENMP_ENABLE` or `PTHREAD_ENABLE` set to `ON` then SuperLU\_MT should be set to use the same threading type.



## 1.2 Building and Running Examples

Each of the SUNDIALS solvers is distributed with a set of examples demonstrating basic usage. To build and install the examples, set both `EXAMPLES_ENABLE` and `EXAMPLES_INSTALL` to `ON`. Specify the installation path for the examples with the variable `EXAMPLES_INSTALL_PATH`. CMake will generate `CMakeLists.txt` configuration files (and `Makefile` files if on Linux/Unix) that reference the *installed* SUNDIALS headers and libraries.

From within the installed example directory, run CMake (either with the GUI or command line) to compile the example code. The resulting output from running the example can be compared with example output bundled in the SUNDIALS distribution.

NOTE: There will likely differences in the output due to machine architecture, compiler versions, use of third party libraries etc.

These examples with the installed configuration files can be used as "templates" for user developed solutions.



## 1.3 Configuring, building, and installing on Windows

Use `CMakeSetup` from the CMake install location. Make sure to select the appropriate source and the build directory. Also, make sure to pick the appropriate generator (on Visual Studio 6, pick the

Visual Studio 6 generator). Some CMake versions will ask you to select the generator the first time you press Configure instead of having a drop-down menu in the main dialog.

CMake will now create Visual Studio project files. You should now be able to open the SUNDIALS project (or workspace) file. Make sure to select the appropriate build type (Debug, Release, ...). To build SUNDIALS, simply build the `ALL_BUILD` target. To install SUNDIALS, simply run the `INSTALL` target within the build system.

## 1.4 Installed libraries and exported header files

Using the CMake SUNDIALS build system, the command

```
% make install
```

will install the libraries under *libdir* and the public header files under *includedir*. The default values for these directories are *instdir/lib* and *instdir/include*, respectively, but can be changed using the configure script options `--prefix`, `--exec-prefix`, `--includedir` and `--libdir` (see the appropriate CMake options). For example, a global installation of SUNDIALS on a \*NIX system could be accomplished using

```
% configure --prefix=/opt/sundials-2.1.1
```

Although all installed libraries reside under *libdir*, the public header files are further organized into subdirectories under *includedir*.

The installed libraries and exported header files are listed for reference in Tables [1.1](#) and [1.2](#). The file extension *.lib* is typically *.so* for shared libraries and *.a* for static libraries. Note that, in the Tables, names are relative to *libdir* for libraries and to *includedir* for header files.

A typical user program need not explicitly include any of the shared SUNDIALS header files from under the *includedir/sundials* directory since they are explicitly included by the appropriate solver header files (*e.g.*, `cvode_dense.h` includes `sundials_dense.h`). However, it is both legal and safe to do so (*e.g.*, the functions declared in `sundials_dense.h` could be used in building a preconditioner).

Table 1.1: SUNDIALS libraries and header files

SHARED	Libraries	n/a	
	Header files	sundials/sundials_config.h	sundials/sundials_types.h
		sundials/sundials_math.h	
		sundials/sundials_nvector.h	sundials/sundials_fnvector.h
		sundials/sundials_direct.h	sundials/sundials_lapack.h
		sundials/sundials_dense.h	sundials/sundials_band.h
		sundials/sundials_sparse.h	
		sundials/sundials_iterative.h	sundials/sundials_spgmr.h
		sundials/sundials_spgmrs.h	sundials/sundials_sptfqmr.h
		sundials/sundials_pcg.h	sundials/sundials_spgmrs.h
NVECTOR_SERIAL	Libraries	libsundials_nvecserial. <i>lib</i>	libsundials_fnvecserial.a
	Header files	nvector/nvector_serial.h	
NVECTOR_PARALLEL	Libraries	libsundials_nvecparallel. <i>lib</i>	libsundials_fnvecparallel.a
	Header files	nvector/nvector_parallel.h	
NVECTOR_OPENMP	Libraries	libsundials_nvecopenmp. <i>lib</i>	libsundials_fnvecopenmp.a
	Header files	nvector/nvector_openmp.h	
NVECTOR_PTHREADS	Libraries	libsundials_nvecpthreads. <i>lib</i>	libsundials_fnvecpthreads.a
	Header files	nvector/nvector_pthreads.h	
CVODE	Libraries	libsundials_cvode. <i>lib</i>	libsundials_fcvcde.a
	Header files	cvode/cvode.h	cvode/cvode_impl.h
		cvode/cvode_direct.h	cvode/cvode_lapack.h
		cvode/cvode_dense.h	cvode/cvode_band.h
		cvode/cvode_diag.h	
		cvode/cvode_sparse.h	cvode/cvode_klu.h
		cvode/cvode_superlumt.h	
		cvode/cvode_spils.h	cvode/cvode_spgmr.h
		cvode/cvode_sptfqmr.h	cvode/cvode_spgmrs.h
		cvode/cvode_bandpre.h	cvode/cvode_bbdpre.h
CVODES	Libraries	libsundials_cvodes. <i>lib</i>	
	Header files	cvodes/cvodes.h	cvodes/cvodes_impl.h
		cvodes/cvodes_direct.h	cvodes/cvodes_lapack.h
		cvodes/cvodes_dense.h	cvodes/cvodes_band.h
		cvodes/cvodes_diag.h	
		cvodes/cvodes_sparse.h	cvodes/cvodes_klu.h
		cvodes/cvodes_superlumt.h	
		cvodes/cvodes_spils.h	cvodes/cvodes_spgmr.h
		cvodes/cvodes_sptfqmr.h	cvodes/cvodes_spgmrs.h
		cvodes/cvodes_bandpre.h	cvodes/cvodes_bbdpre.h
ARKODE	Libraries	libsundials_arkode. <i>lib</i>	libsundials_farkode.a
	Header files	arkode/arkode.h	arkode/arkode_impl.h
		arkode/arkode_direct.h	arkode/arkode_lapack.h
		arkode/arkode_dense.h	arkode/arkode_band.h
		arkode/arkode_sparse.h	arkode/arkode_klu.h
		arkode/arkode_superlumt.h	
		arkode/arkode_spils.h	arkode/arkode_spgmr.h
		arkode/arkode_sptfqmr.h	arkode/arkode_spgmrs.h
		arkode/arkode_pcg.h	arkode/arkode_spgmrs.h
		arkode/arkode_bandpre.h	arkode/arkode_bbdpre.h

Table 1.2: SUNDIALS libraries and header files (cont.)

IDA	Libraries	libsundials_ida. <i>lib</i>	libsundials_fida.a
	Header files	ida/ida.h ida/ida_direct.h ida/ida_dense.h ida/ida_sparse.h ida/ida_superlunt.h ida/ida_spils.h ida/ida_spgmr.h ida/ida_sptfqmr.h	ida/ida_impl.h ida/ida_lapack.h ida/ida_band.h ida/ida_klu.h ida/ida_spgmr.h ida/ida_sptfqmr.h
IDAS	Libraries	libsundials_idas. <i>lib</i>	
	Header files	idas/idas.h idas/idas_direct.h idas/idas_dense.h idas/idas_sparse.h idas/idas_superlunt.h idas/idas_spils.h idas/idas_spgmr.h idas/idas_sptfqmr.h	idas/idas_impl.h idas/idas_lapack.h idas/idas_band.h idas/idas_klu.h idas/idas_spgmr.h idas/idas_sptfqmr.h
KINSOL	Libraries	libsundials_kinsol. <i>lib</i>	libsundials_fkinsol.a
	Header files	kinsol/kinsol.h kinsol/kinsol_direct.h kinsol/kinsol_dense.h kinsol/kinsol_sparse.h kinsol/kinsol_superlunt.h kinsol/kinsol_spils.h kinsol/kinsol_spgmr.h kinsol/kinsol_sptfqmr.h	kinsol/kinsol_impl.h kinsol/kinsol_lapack.h kinsol/kinsol_band.h kinsol/kinsol_klu.h kinsol/kinsol_spgmr.h kinsol/kinsol_sptfqmr.h kinsol/kinsol_sptfqmr.h

